


Dreifache Rollenketten DIN 8188

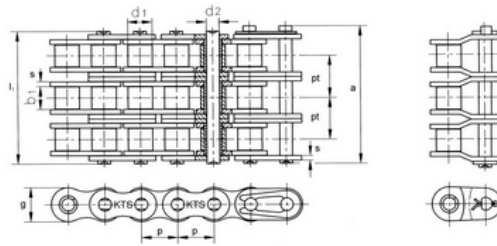

Ketten-Nr.	ANSI Nr.	Teilung p mm	lichte Weite		Rollen-	Bolzen-	Laschen-	Laschen-	Bolzen-	Gesamt-	Quer-	Bruch-	Ge-
			Innenglied b1 mm	b2 mm	durchm. d2 mm	durchm. d2 mm	höhe g mm	dicke g mm	länge l1 mm	länge a mm	teilung pt mm	kraft FB kN	wicht q kg / m
		min.	max.	max.	max.	max.	max.	max.	max.	max.		min.	ca.
*04C-3	*25-3	6,350	3,18	3,30	2,31	6,0	0,8	21,0	21,5	6,40	10,5	0,44	
*06C-3	*35-3	9,525	4,77	5,08	3,58	9,0	1,3	32,7	33,5	10,13	23,7	1,05	
08A-3	40-3	12,700	7,85	7,95	3,96	12,0	1,5	45,4	46,6	14,38	42,3	1,90	
10A-3	50-3	15,875	9,40	10,16	5,08	15,1	2,0	57,0	58,5	18,11	66,6	3,09	
12A-3	60-3	19,050	12,57	11,91	5,94	18,0	2,4	71,5	73,3	22,78	95,4	4,54	
16A-3	80-3	25,400	15,75	15,88	7,92	24,0	3,3	91,7	93,6	29,29	170,1	7,89	
20A-3	100-3	31,750	18,90	19,05	9,53	30,0	4,0	112,2	116,3	35,76	265,5	11,77	
24A-3	120-3	38,100	25,22	22,23	11,10	35,7	4,8	141,4	145,2	45,44	381,0	17,53	
28A-3	140-3	44,450	25,22	25,40	12,70	41,0	5,6	152,2	156,8	48,87	517,2	22,20	
32A-3	160-3	50,800	31,55	28,58	14,27	47,8	6,4	181,8	186,6	58,55	680,4	30,02	
36A-3	180-3	57,150	35,48	35,71	17,46	53,6	7,2	204,4	210,2	65,84	840,7	38,22	
40A-3	200-3	63,500	37,85	39,68	19,85	60,0	8,0	223,5	230,4	71,55	1.061,4	49,03	
48A-3	240-3	76,200	47,35	47,63	23,81	72,4	9,5	271,3	278,6	87,83	1.530,9	71,60	