


# Guide rails

## Guide rails with side guides

Guide rails with side guides are preferred where large lateral forces act on the conveyor belt.

### Order example:

Guide rail **FC 50 x 4,5 / 1200**  
 Type \_\_\_\_\_  
 For Belt width x h \_\_\_\_\_  
 Length in mm \_\_\_\_\_

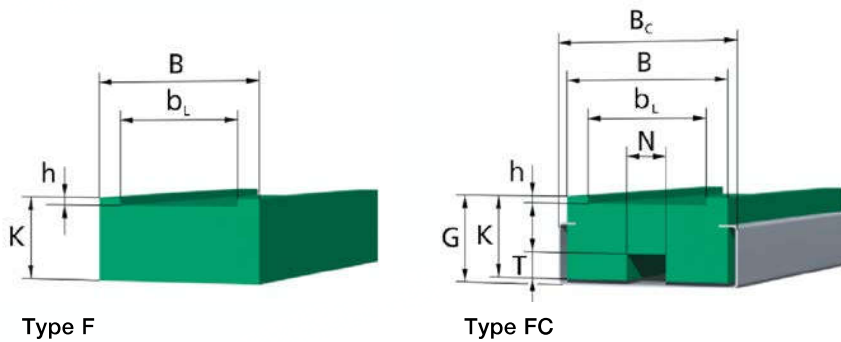

Type	B	B <sub>c</sub>	bl	K	h	G	N	T	for timing belt width
F 32 x 2	45	-	33	22	2	-	-	-	32 AT 5 32 T 5
F 50 x 2	68	-	51	32	2	-	-	-	50 AT 5 50 T 5
F 75 x 2	93	-	76	32	2	-	-	-	75 AT 5 75 T 5
F 100x 2	118	-	101	32	2	-	-	-	100 AT 5 100 T 5
F 32 x 4	45	-	33	22	4	-	-	-	32 AT 10 32 T 10
F 50 x 4	68	-	51	32	4	-	-	-	50 AT 10 50 T 10
F 75 x 4	93	-	76	32	4	-	-	-	75 AT 10 75 T 10
F 100x 4	118	-	101	32	4	-	-	-	100 AT 10 100 T 10
F 50 x 7	68	-	51	32	7	-	-	-	50 AT 20 50 T 20
F 75 x 7	93	-	76	32	7	-	-	-	75 AT 20 75 T 20
F 100x 7	118	-	101	32	7	-	-	-	100 AT 20 100 T 20
FC 32 x 2	45	50	33	22	2	23.5	11	7	32 AT 5 32 T 5
FC 50 x 2	68	75	51	32	2	34.5	14	9	50 AT 5 50 T 5
FC 75 x 2	93	100	76	32	2	34.5	14	9	75 AT 5 75 T 5
FC 100x 2	118	125	101	32	2	34.5	14	9	100 AT 5 100 T 5
FC 32 x 4	45	50	33	22	4	23.5	11	7	32 AT 10 32 T 10
FC 50 x 4	68	75	51	32	4	34.5	14	9	50 AT 10 50 T 10
FC 75 x 4	93	100	76	32	4	34.5	14	9	75 AT 10 75 T 10
FC 100x 4	118	125	101	32	4	34.5	14	9	100 AT 10 100 T 10
FC 50 x 7	68	75	51	32	7	34.5	14	9	50 AT 20 50 T 20
FC 75 x 7	93	100	76	32	7	34.5	14	9	75 AT 20 75 T 20
FC 100x 7	118	125	101	32	7	34.5	14	9	100 AT 20 100 T 20