



TOOLFLEX® M

Metal bellow-type couplings


Type M: Hubs with threads for setscrews

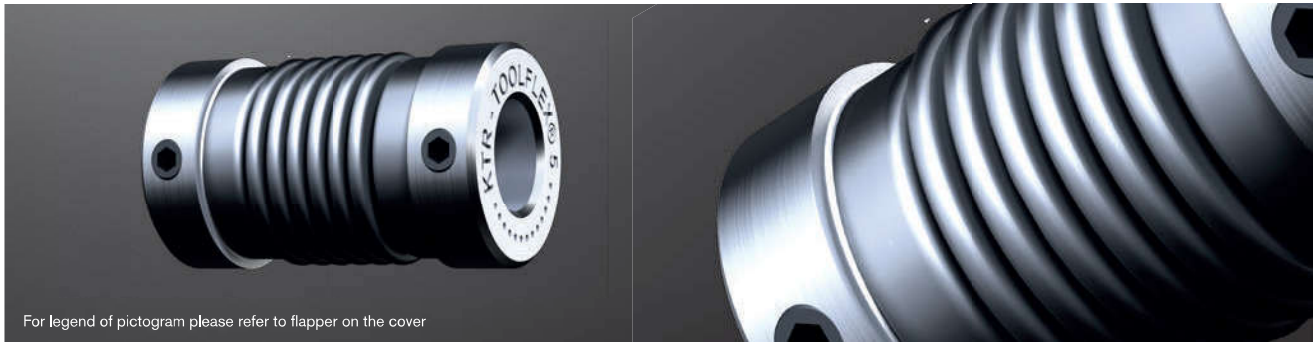

For legend of pictogram please refer to flapper on the cover



TOOLFLEX® M type 1.1

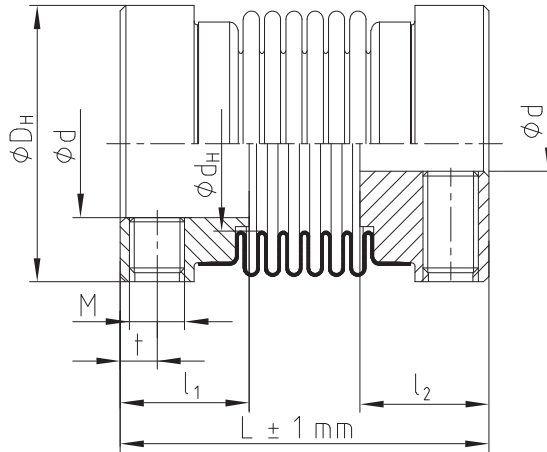

TOOLFLEX® M with thread for setscrews (type 1.1) - Hub material aluminium/bellow material stainless steel

Size	Bellow-hub-connection	Torque of bellow T_{KN} ¹⁾ [Nm]	Max. speed [rpm]	Dimensions [mm]									Perm. displacements			Torsion spring stiffness C_T [Nm/rad]	Weight ³⁾ [kg]
				Finish bore d		General				Thread for setscrews			Axial [mm]	Radial [mm]	Angular [degree]		
				Min.	Max.	D_H	d_H	L	l_1, l_2	M	t	z = number ²⁾					
5	4)	0.1	47700	2	5	10	6	17	6	M2	1.8	1	±0.40	0.15	1.0	75	0.003
7		1.0	31800	3	8	15	9	20	7	M3	2.0	1	±0.40	0.15	1.0	300	0.006
9		1.5	23800	3	10	20	12	24	8	M3	2.2	2	±0.50	0.20	1.5	580	0.011
12	5)	2.0	19000	4	14	25	16	31	11	M4	2.8	2	±0.60	0.20	1.5	980	0.019
16		5.0	14900	5	18	32	20	41	13	M5	4	2	±0.50	0.20	1.5	3050	0.049
20		15	11900	6	25	40	27	49	15	M5	5	2	±0.60	0.20	1.5	6600	0.082

¹⁾ For selection see page 22 et seqq.

²⁾ Number each hub; from size 9: 2 x 120° offset.

³⁾ Figures refer to the complete coupling with max. bore.

⁴⁾ Bonded

⁵⁾ Flanged


Types of hubs

Type 1.0




Hub with feather keyway and setscrew

Type 1.1




Hub without feather keyway, with setscrew

Type 1.2



Hub without feather keyway, without setscrew

Type 1.3



Hub with spline bore

Ordering example:

TOOLFLEX® 7 M	1.1 - Ø4		1.1 - Ø6	
Size and type of coupling	Hub design	Finish bore	Hub design	Finish bore