



SCHWINGMETALL® Anschlagpuffer

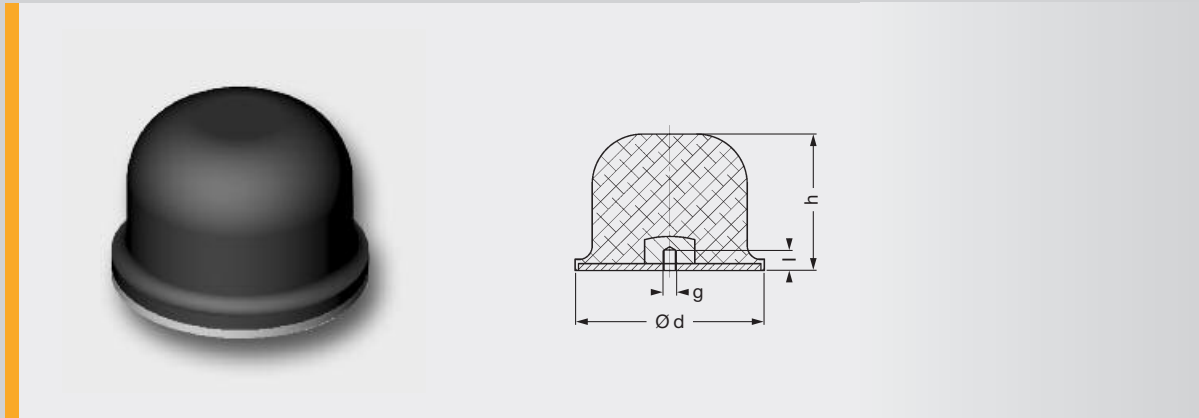

Anschlagpuffer mit Innengewinde									
Abmessungen				max. Belastungen		Masse Stück [kg]	Elastomer Härte [Shore A]	Form-Nr.	Artikel-Nr.
d [mm]	h [mm]	l [mm]	g	F _z [N]	W [N/mm]				
52	35	8,8	M10	3874	23,000	0,085	55	38652	3915250000
83	60	11,6	M12	11572	120,000	0,340	55	38653	3915251000
125	90	17,5	M16	29148	380,000	1,200	55	38654	3915252000


Belastungsrichtung




Kraft- und Energie-Weg-Diagramme




Form-Nr. 38652

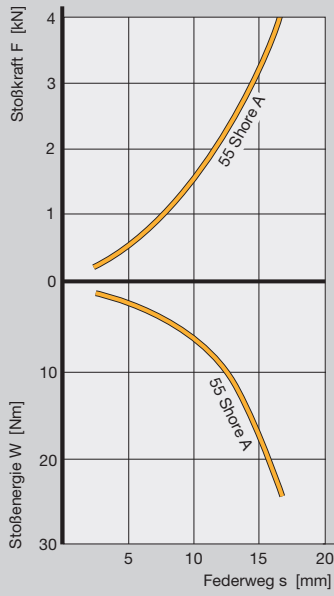


Form-Nr. 38653

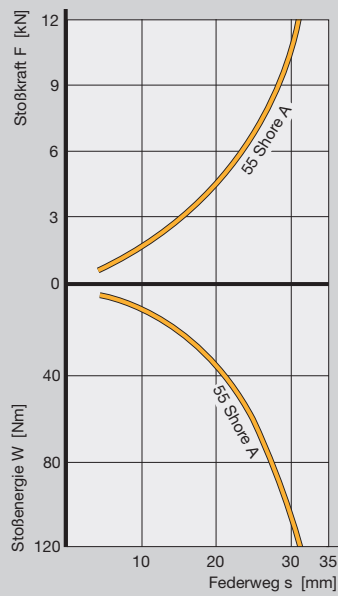

Form-Nr. 38654

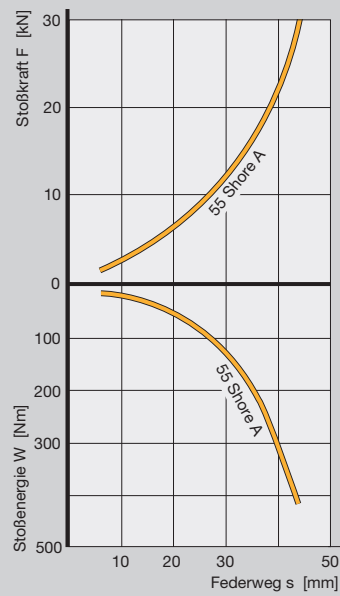


SCHWINGMETALL® Anschlagpuffer

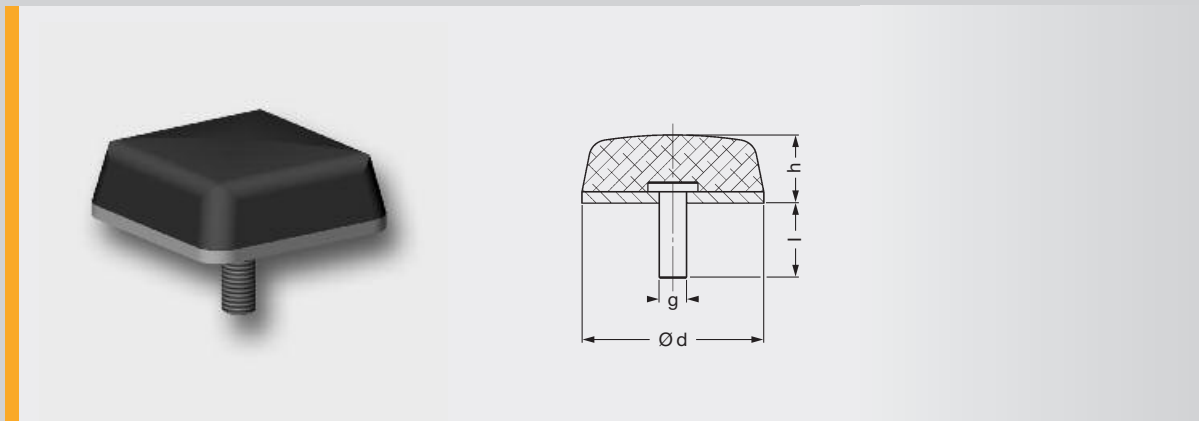

Anschlagpuffer mit Außengewinde										
Abmessungen				max. Belastungen		Masse Stück [kg]	Elastomer Härte [Shore A]	Form-Nr.	Artikel-Nr.	
d [mm]	h [mm]	l [mm]	g	F _z [N]	W [N/mm]					
25	16,5	18,5	M6	991	3,2	0,015	40	25444	■	
25	16,5	18,5	M6	953	2,5	0,015	55	25444	3915209000	
25	16,5	18,5	M6	1173	2,2	0,015	65	25444	■	
50	17,0	28,0	M10	3586	5,4	0,077	40	25481	■	
50	17,0	28,0	M10	3909	5,5	0,077	55	25481	3915216000	
50	17,0	28,0	M10	3918	4,5	0,077	65	25481	■	
□ 80	30,0	35,0	M12	19563	83	0,419	40	25443	■	
□ 80	30,0	35,0	M12	20608	64	0,419	55	25443	3915223000	
□ 80	30,0	35,0	M12	20206	49	0,419	65	25443	■	
125	45,0	43,0	M16	49143	320	0,920	55	38655	3915223000	


■ Anfertigungsware

Belastungsrichtung




Kraft- und Energie-Weg-Diagramme


Form-Nr. 25444

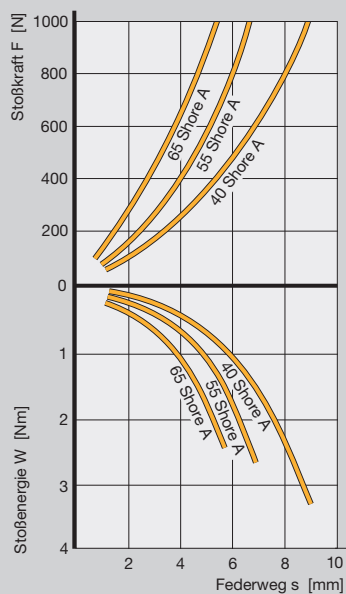


Form-Nr. 25481

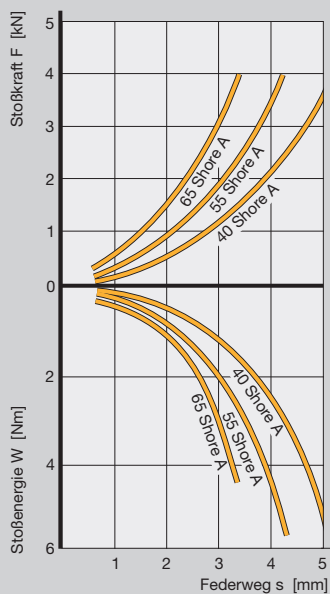



Form-Nr. 25443

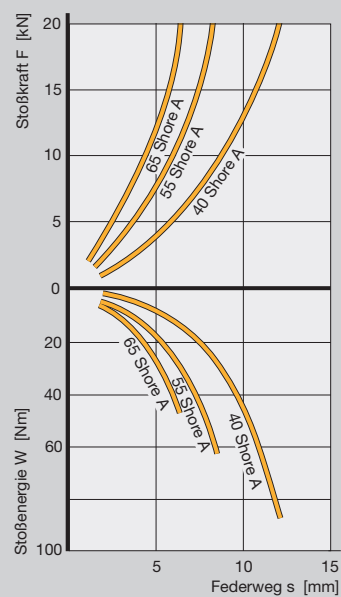

Form-Nr. 38655

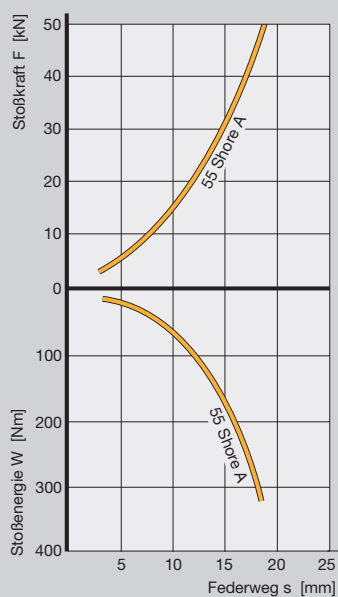


SCHWINGMETALL® Anschlagsschienen

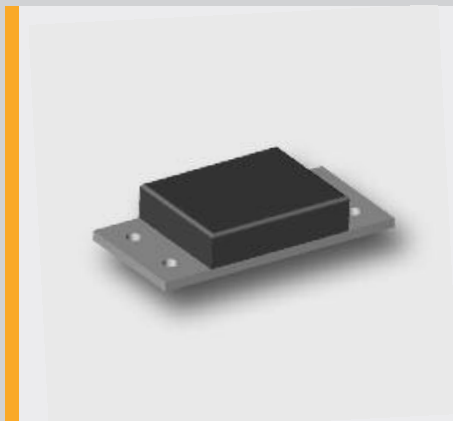

Anschlagsschienen													
Abmessungen								max. Belastungen		Masse Stück [kg]	Elastomer Härte [Shore A]	Form-Nr.	Artikel-Nr.
a1 [mm]	a2 [mm]	b [mm]	d [mm]	h [mm]	l1 [mm]	l2 [mm]	s [mm]	F _Z [N]	W [N/mm]				
100	1) ¹⁾	50	2 x 8.5	35	70	130	5	10100	40	0,360	55	25081b/AN	3973501000
100	1) ¹⁾	50	2 x 8.5	70	70	130	5	9614	89	0,500	55	25080/AN	3973502000
160	50	100	4 x 13	45	120	200	10	36256	175	1,935	55	20299/AN	3974505000
160	50	100	4 x 13	80	120	200	10	35758	420	2,430	55	24472/AN	3974506000
200	60	120	4 x 15	45	150	250	10	58491	250	2,900	55	21422b/AN	3974507000
200	60	120	4 x 15	70	150	250	10	58654	497	3,470	55	21422/AN	3974508000
250	80	150	4 x 17	50	200	300	15	97971	330	6,150	55	21055b/AN	3975509000
250	80	150	4 x 17	80	200	300	15	99552	950	7,250	55	21055/AN	3975510000

1) a2 ohne Maßangabe entspricht mittiger Bohrung.


Belastungsrichtung




Kraft- und Energie-Weg-Diagramme




Form-Nr. 25081b/AN

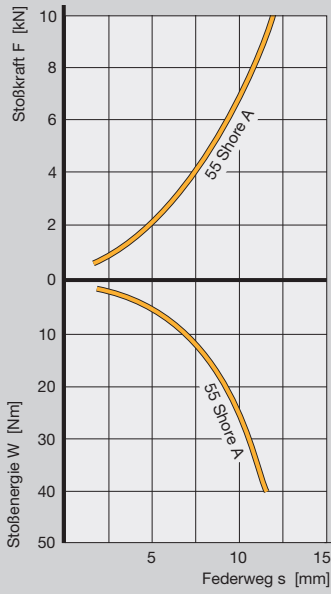


Form-Nr. 25080/AN

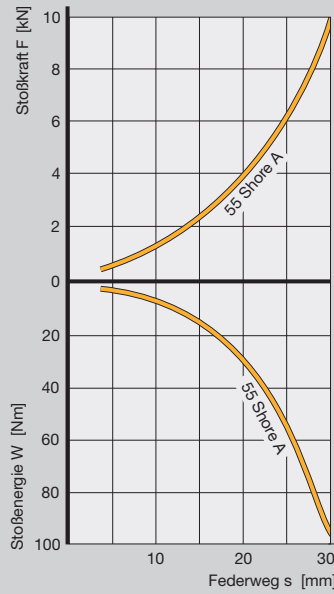


Form-Nr. 20299/AN

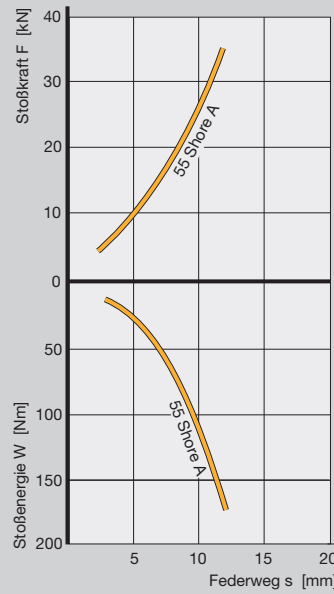


Form-Nr. 24472/AN

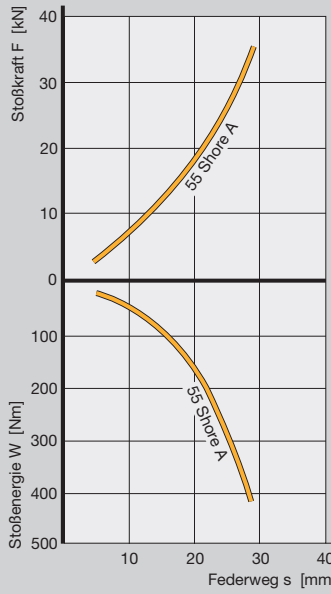


Form-Nr. 21422b/AN

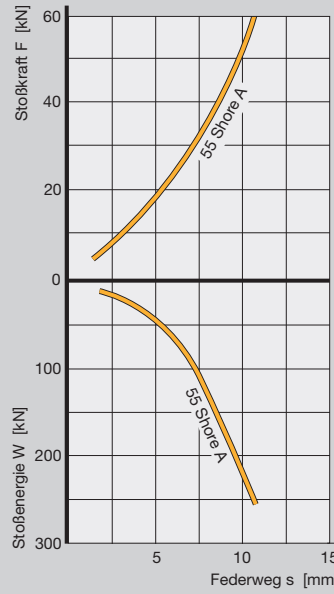


Form-Nr. 21422/AN

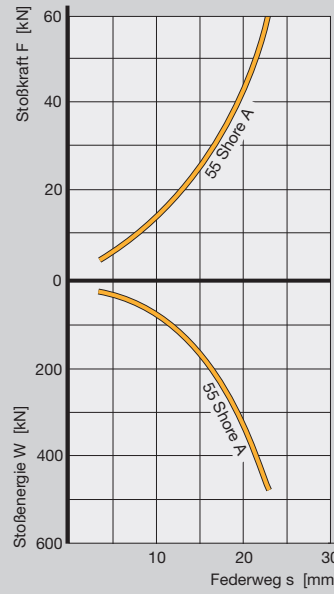

Form-Nr. 21055b/AN

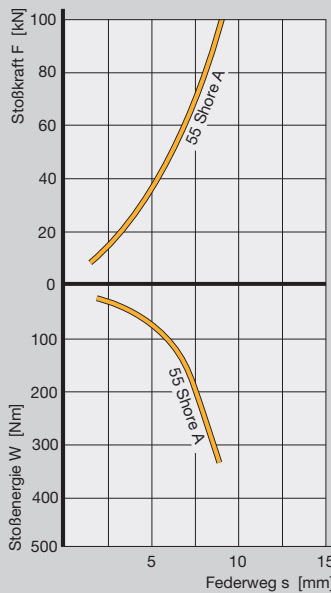

Form-Nr. 21055/AN

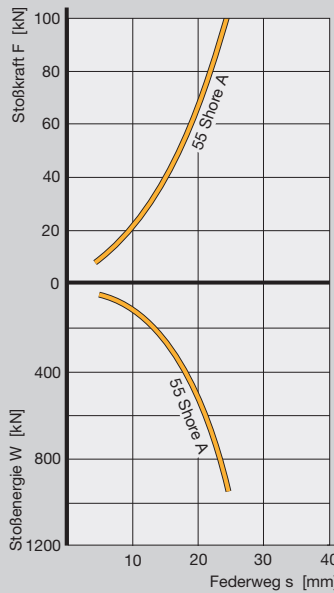

Anschläge